


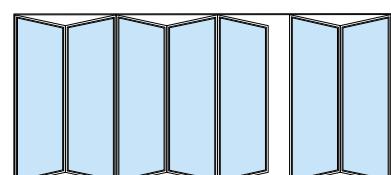








Operational guide



OS2-65

OS2-75

EBE-65

EBE-85

L (mm) H (mm)

L (mm) H (mm)

L (mm) H (mm)

L (mm) H (mm)

Bifold (sash dim.)

Not available

700 min 1000 max 3050

Not available

Not available

L (in) H (in)

L (in) H (in)

L (in) H (in)

L (in) H (in)

Bifold (sash dim.)

Not available

27" min 39" max 120"

Not available

Not available

The elevations above reflect only the Bifold Outswing configuration, but the same options are also available in the Inward configuration